Features

- · Limit switch for bulk solids
- · Device with pipe extension
- · No calibration: easy commissioning (plug and play)
- Insensitive to build-up: maintenance-free operation
- · No mechanically moving parts: no wear, long operating life
- Sensor material stainless steel: hardly any abrasion even with building materials
- · Insensitive to external vibration and flow noises

Function


The device is a robust level limit switch for silos with finegrained or coarse-grained, non-fluidised bulk solids.

The various designs means the device has a wide range of applications. Certificates are also available for use in dust incendive hazard areas.

Typical applications:

cereals, coffee beans, sugar, animal feed, rice, detergents, dye powder, chalk, gypsum, cement, sand, plastic granules

Assembly

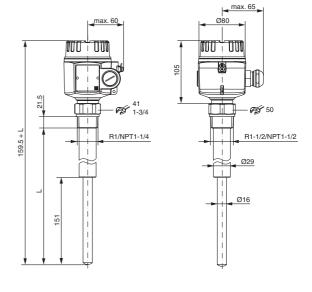








Connection

Connection FEM 22 (E5) 3-wire DC connection (example)

- preferably for use with memory programmable controls (PLC), DI modules as per EN 61131-2
- positive signal at the electronics switch output (PNP)
- Output blocked at level limit.

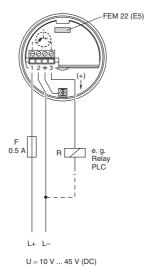

Other connection types see section electrical connection.





Measuring method A piezoelectric drive excises the vibrating rod of the device to its resonance frequency. If medium cover the binding rod, the rod or shorting anythick changes (the Vibration is damped.) The electronics of the device compare the actual amplitude with a target value and indicates whether the vibrating rod or the device compare the actual amplitude with a target value and indicates whether the vibrating rod is vibrating freely whether it is covered by medium. The measuring system consists of: - the device with piezo extension Operating mode The measuring system consists of: - the device with piezoe extension MAX = maximum safety: - the device with piezoe attension MAX = maximum safety: - the device with piezoe attension MAX = maximum safety: - the device with piezoe attension MAX = maximum safety: - the device with piezoe attension MAX = maximum safety: - the device without is the probe is covered or if the supply voltage is disconnected in a safety-oriented man (signal on alarm): - example application: overspill protection MIX = minimum safety: - the device without is the probe is covered or if the supply voltage is disconnected in a safety-oriented man (signal on alarm): - example application: overspill protection Applications and the supply voltage is disconnected in a safety-oriented man (signal on alarm): - example application: overspill protection Gurrent consumption dectoroic insent FEM22 (EE): 10 45 V DC - dectoroic insent FEM22 (EE): 10 45 V DC - dectoroic insent FEM22 (EE): 10 45 V DC - dectoroic insent FEM22 (EE): 10 45 V DC - dectoroic insent FEM22 (EE): 10 45 V DC - dectoroic insent FEM22 (EE): 10 45 V DC - dectoroic insent FEM22 (EE): 10 45 V DC - dectoroic insent FEM22 (EE): 10 45 V DC - dectoroic insent FEM22 (EE): 10 45 V DC - dectoroic insent FEM22 (EE): 10 45 V DC - dectoroic insent FEM22 (EE): 10 45 V DC - dectoroic insent FEM22 (EE): 10 45 V DC - dectoroic insent FEM22 (EE): 10 45 V DC - dectoroic insent FEM22 (General specifications		
- the device with electronic insent - a supply port of a supply work of the commercial control systems, switching units, signalling systems (e.g. lamps, horns, PCS, PLC, etc.) device with pipe extension MAX = maximum safety: The device with pipe extension MAX = maximum safety: The device switches if the probe is covered or if the supply voltage is disconnected in a safety-oriented man (signal on alarm). scample application: overspill protection The device switches if the probe is uncovered or if the supply woltage is disconnected in a safety-oriented man (signal on alarm). example application: dey-running protection Supply Rated voltage electronic insent FEM22 (EIS): 10 45 V DC electronic insen	Measuring method		A piezoelectric drive excites the vibrating rod of the device to its resonance frequency. If medium covers the vibrating rod, the rod's vibrating amplitude changes (the vibration is damped). The electronics of the device compare the actual amplitude with a target value and indicates whether the vibrating rod is vibrating freely or whether it is covered by medium.
Operating mode MAX = maximum safety: The device switches if the probe is covered or if the supply voltage is disconnected in a safety-oriented man (signal on alarm). Amount of the supply voltage is disconnected in a safety-oriented man (signal on alarm). Final device switches if the probe is uncovered or if the supply voltage is disconnected in a safety-oriented manner (signal on alarm). Final device switches if the probe is uncovered or if the supply voltage is disconnected in a safety-oriented manner (signal on alarm). Final device switches if the probe is uncovered or if the supply voltage is disconnected in a safety-oriented manner (signal on alarm). Final device switches is the probe is uncovered or if the supply voltage is disconnected in a safety-oriented manner (signal on alarm). Final device switches is the probe is uncovered or if the supply voltage is disconnected in a safety-oriented manner (signal on alarm). Final device switches is uncovered or safety in the supply voltage is disconnected in a safety-oriented manner (signal on alarm). Final device switches is uncovered or safety in the supply voltage is disconnected in a safety-oriented manner (signal on alarm). Final device switches is uncovered or safety in the supply voltage is disconnected in a safety-oriented manner (signal on alarm). Final device switches is uncovered or safety in the supply voltage is disconnected in a safety-oriented manner (signal on alarm). Final device switches is uncovered or safety in the supply voltage is disconnected in a safety-oriented manner (signal on alarm). Final device switches is uncovered or safety in the supply voltage is disconnected in a safety-oriented manner (signal on alarm). Final device switches is uncovered or safety in the supply voltage is disconnected in a safety-oriented manner (signal on alarm). Final device oriented is uncovered oriented in the supply voltage is disconnected in a safety-oriented probe oriented in a safety oriented in a safety oriented in a safety oriented in a	Equipment architecture		- the device with electronic insert - a supply point
The device awitches if the probe is covered or if the supply voltage is disconnected in a safety-oriented man (signal on a fairs). example application: overspill protection MIN = minimum safey: The device switches if the probe is uncovered or if the supply voltage is disconnected in a safety-oriented manner (signal on alam). example application: dis-running protection Supply Rated voltage U, electronic insert FEM22 (ES): 10 45 V DC electronic consumption electronic insert FEM22 (ES): 10 45 V DC electronic consumption electronic insert FEM22 (ES): 10 45 V DC electronic consumption electronic insert FEM22 (ES): 10 45 V DC electronic consumption electronic insert FEM22 (ES): 10 45 V DC electronic insert FEM24 (WA): 10 45 V DC electronic insert FEM24 (WA): 10 45 V DC electronic insert FEM24 (WA): 10 45 V DC electronic inser	Construction type		device with pipe extension
Rated voltage Ur electronic insert FEMA2 (FS): 10 48 V DC electronic insert FEMA2 (Ms): 19 258 V AC, 50/80 Hz or 19 55 V DC electronic insert FEMA2 (Ws): 19 258 V AC, 50/80 Hz or 19 55 V DC electronic insert FEMA2 (ES): max . 18 W electronic insert FEMA2 (ES): max . 0.8 W electronic insert FEMA2 (WA): max 1.3 W separation voltage 2 2 kV surge protection Electrical specifications Surge protection Input Input signal Input signal probe covered - small amplitude probe not c	Operating mode		The device switches if the probe is covered or if the supply voltage is disconnected in a safety-oriented manner (signal on alarm). example application: overspill protection MIN = minimum safety: The device switches if the probe is uncovered or if the supply voltage is disconnected in a safetyoriented manner (signal on alarm).
Rated voltage Ur electronic insert FEMA2 (FS): 10 48 V DC electronic insert FEMA2 (Ms): 19 258 V AC, 50/80 Hz or 19 55 V DC electronic insert FEMA2 (Ws): 19 258 V AC, 50/80 Hz or 19 55 V DC electronic insert FEMA2 (ES): max . 18 W electronic insert FEMA2 (ES): max . 0.8 W electronic insert FEMA2 (WA): max 1.3 W separation voltage 2 2 kV surge protection Electrical specifications Surge protection Input Input signal Input signal probe covered - small amplitude probe not c	Supply		
electronic insert FEM22 (E5): max. 18 mA		U _r	
Several consumption Selectronic insert FEM22 (ES): rax, 0.81 W	Ripple		electronic insert FEM22 (E5): max. 5 V, 0 400 Hz
electronic insert FEM 24 (WA): max 1.3 W	Current consumption		electronic insert FEM22 (E5): max. 18 mA
Electrical specifications Surge protection electronic insert FEM22 (E5): overvoltage category III	Power consumption		electronic insert FEM 24 (WA): max. 1.3 W
electronic insert FEM22 (E5): overvoltage category III input input signal Measured variable Measurement range Measurement range Electronic insert FEM22 (E5): load decording to the mounting location and the overall length) The measuring range depends on the mounting location of the device and the length of the pipe extension selected. The pipe extension is available in the following lengths: 500 mm, 1000 mm, 1500 mm, 20 inch, 40 inch, 60 inch, 40 inch, 40 inch, 60 inch, 40 inch, 40 inch, 60 inch, 40 inch, 40 inch, 40 inch, 40 inch, 40 inch, 60 inch, 40 inch, 4			separation voltage 2.2 kV
input signal probe covered - small amplitude probe not covered - large amplitude probe not covered - large amplitude level (according to the mounting location and the overall length) Measurement range	Electrical specifications		
probe covered - small amplitude probe not covered - large amplitude probe not covered - large amplitude level (according to the mounting location and the overall length)			electronic insert FEM22 (E5) : overvoltage category III
probe not covered - large amplitude level (according to the mounting location and the overall length) Measurement range The measuring range depends on the mounting location of the device and the length of the pipe extension selected. The pipe extension is available in the following lengths: 500 mm, 1000 mm, 1500 mm, 20 inch, 40 inch, 60! Output Load electronic insert FEM22 (E5): - load switched via transistor and separate PNP connection - load current: max. 45 V (cyclical overfload and short-circuit protection), continuous max. 350 mA - residual current: - 100 µA (for blocked transistor) - capacitive load: max. 0.5 µF for 45 V, max. 1.0 µF for 24 V - residual voltage: - 3 V (for transistor switched through) electronic insert FEM24 (WA): - loads switched via 2 floating change-over contacts - version AD: I max. 6 A to 30 V, I max. 0.2 A to 125 V - the following applies when connecting a functional extra-low voltage circuit with double insulation as per I 1010: sum of voltages of relay output and power supply max. 300 V Switch-on delay Un - correct switching after max. 3 s Output signal Signal on alarm - delectronic insert FEM22 (E5): output signal on power failure or in the event of device failure -< 100 µA (electronic insert FEM24 (WA): output signal in event of power failure - relay de-energised Galvanic isolation Input/Oper supply - electronic insert FEM22 (E5): output signal in event of power failure - relay de-energised Gelctronic insert FEM24 (WA): electronic insert FEM24 (WA) Directive 2014/30/EU - electronic insert FEM24 (WA): EN 61010-1:2010 Conformity Electromagnetic compatibility - NE 21 Degree of protection - EN 60088-2-27 Climate class - EN 60088-2-27 Climate class - EN 60088-2-27 Climate class - Wend Covering the sensor approx. 0.5 s, when uncovering the sensor approx. 1.0 s	•		
Measurement range The measuring range depends on the mounting location of the device and the length of the pipe extension selected. The pipe extension is available in the following lengths: 500 mm, 1000 mm, 1500 mm, 20 inch, 40 inch, 60 inch, 40 inch, 4	•		probe not covered - large amplitude
Selected. The pipe extension is available in the following lengths: 500 mm, 1000 mm, 20 inch, 40 inch, 60 inch, 40 inch, 60 inches of the pipe extension is available in the following lengths: 500 mm, 1000 mm, 20 inch, 40 inch, 60 inches of the pipe extension is available in the following lengths: 500 mm, 1000 mm, 20 inch, 40 inch, 60 inches of the pipe extension is available in the following lengths: 500 mm, 1000 mm, 1500 mm, 20 inch, 40 inch, 60 inches of the pipe extension is available in the following lengths: 500 mm, 1000 mm, 1500 mm, 20 inch, 40 inch, 60 inches of the pipe extension is available in the following delectronic insert FEM24 (WA): - load switched via 2 floating change-over contacts - version AC: I max. 6 A, U max. 253 V; P max. 1500 VA, cos φ = 1, P max. 750 VA, cos φ > 0.7 - version DC: I max. 6 A to 30 V, I max. 0.2 A to 125 V - the following applies when connecting a functional extra-low voltage circuit with double insulation as per I 1010: sum of voltages of relay output and power supply max. 300 V Switch-on delay Correct switching after max. 3 s digital digital electronic insert FEM22 (E5): output signal on power failure or in the event of device failure ~ 100 μA electronic insert FEM24 (WA): output signal in event of power failure - relay de-energised Galvanic isolation Input/power supply electronic insert FEM22 (E5): output signal in event of power failure - relay de-energised Galvanic insert FEM24 (WA): output signal in event of power failure - relay de-energised Galvanic insert FEM24 (WA): output signal in event of power failure - relay de-energised Galvanic insert FEM24 (WA): output signal in event of power failure - relay de-energised Galvanic insert FEM24 (WA): output signal in event of power failure - relay de-energised Galvanic insert FEM24 (WA): EN 61010-1:2010 Corrective 2014/35/EU	Measured variable		
electronic insert FEM22 (E5): - load switched via transistor and separate PNP connection - load current: - max. 45 V (cyclical overload and short-circuit protection), continuous max. 350 mA - residual current: < 100 μA (for blocked transistor) - capacitive load: max. 0.5 μF for 45 V, max. 1.0 μF for 24 V - residual voltage: < 3 V (for transistor switched through) electronic insert FEM24 (WA): - loads switched via 2 floating change-over contacts - version AC: I max. 6 A, U max. 253 V; P max. 1500 VA, cos φ = 1, P max. 750 VA, cos φ > 0.7 - version DC: I max. 6 A, U max. 253 V; P max. 1500 VA, cos φ = 1, P max. 750 VA, cos φ > 0.7 - version DC: I max. 6 A to 30 V, I max. 0.2 A to 125 V - the following applies when connecting a functional extra-low voltage circuit with double insulation as per I 1010: sum of voltages of relay output and power supply max. 300 V - the following applies when connecting a functional extra-low voltage circuit with double insulation as per I 1010: sum of voltages of relay output and power supply max. 300 V - the following applies when connecting a functional extra-low voltage circuit with double insulation as per I 1010: sum of voltages of relay output signal on power failure or in the event of device failure - < 100 μA electronic insert FEM22 (E5): output signal on power failure or in the event of device failure - < 100 μA electronic insert FEM24 (WA): output signal in event of power failure - relay de-energised electronic insert FEM24 (WA) Directive conformity	Measurement range		
load switched via transistor and separate PNP connection load current: max. 45 V (cyclical overload and short-circuit protection), continuous max. 350 mA residual current: max. 45 V (cyclical overload and short-circuit protection), continuous max. 350 mA residual current: 4100 μA (for blocked transistor) capacitive load: max. 0.5 μF for 45 V, max. 1.0 μF for 24 V residual voltage: < 3 V (for transistor switched through) electronic insert FEM24 (WA): loads switched via 2 floating change-over contacts version Ac: I max. 6.1 u max. 253 V; P max. 1500 VA, cos φ = 1, P max. 750 VA, cos φ > 0.7 version DC: I max. 6.3 to 30 V, I max. 0.2 A to 125 V the following applies when connecting a functional extra-low voltage circuit with double insulation as per I 1010: sum of voltages of relay output and power supply max. 300 V correct switching after max. 3 s digital signal on alarm	Output		
Output signaldigitalSignal on alarmelectronic insert FEM22 (E5): output signal on power failure or in the event of device failure - < 100 μA electronic insert FEM24 (WA): output signal in event of power failure - relay de-energised			- load switched via transistor and separate PNP connection - load current: max. 45 V (cyclical overload and short-circuit protection), continuous max. 350 mA - residual current: < 100 μ A (for blocked transistor) - capacitive load: max. 0.5 μ F for 45 V, max. 1.0 μ F for 24 V - residual voltage: < 3 V (for transistor switched through) electronic insert FEM24 (WA): - loads switched via 2 floating change-over contacts - version AC: I max. 6 A, U max. 253 V; P max. 1500 VA, cos ϕ = 1, P max. 750 VA, cos ϕ > 0.7 - version DC: I max. 6 A to 30 V, I max. 0.2 A to 125 V - the following applies when connecting a functional extra-low voltage circuit with double insulation as per IEC 1010: sum of voltages of relay output and power supply max. 300 V
Signal on alarm electronic insert FEM22 (E5): output signal on power failure or in the event of device failure - < 100 μA electronic insert FEM24 (WA): output signal in event of power failure - relay de-energised Galvanic isolation Input/power supply electronic insert FEM22 (E5) Input/Other circuits electronic insert FEM24 (WA) Directive conformity Electromagnetic compatibility Directive 2014/30/EU EN 61326-1:2006 , EN 61326-2-3:2006 Low voltage Directive 2014/35/EU electronic insert FEM24 (WA) : EN 61010-1:2010 Conformity Electromagnetic compatibility NE 21 Degree of protection IEC 60529:2001 Vibration resistance EN 60068-2-27 Climate class EN 60068, part 2-38, fig. 2a Measurement accuracy Measuring frequency 700 800 Hz when covering the sensor approx. 0.5 s, when uncovering the sensor approx. 1.0 s	Switch-on delay	t _{on}	-
electronic insert FEM24 (WA): output signal in event of power failure - relay de-energised Galvanic isolation Input/power supply electronic insert FEM22 (E5) Input/Other circuits electronic insert FEM24 (WA) Directive conformity Electromagnetic compatibility Directive 2014/30/EU EN 61326-1:2006 , EN 61326-2-3:2006 Low voltage Directive 2014/35/EU electronic insert FEM24 (WA) : EN 61010-1:2010 Conformity Electromagnetic compatibility NE 21 Degree of protection IEC 60529:2001 Vibration resistance EN 60068-2-27 Climate class EN 60068, part 2-38, fig. 2a Measurement accuracy Measuring frequency 700 800 Hz Switching time when covering the sensor approx. 0.5 s, when uncovering the sensor approx. 1.0 s			
Input/power supply electronic insert FEM22 (E5) Input/Other circuits electronic insert FEM24 (WA) Directive conformity Electromagnetic compatibility Directive 2014/30/EU EN 61326-1:2006 , EN 61326-2-3:2006 Low voltage Directive 2014/35/EU electronic insert FEM24 (WA) : EN 61010-1:2010 Conformity Electromagnetic compatibility NE 21 Degree of protection IEC 60529:2001 Vibration resistance EN 60068-2-27 Climate class EN 60068, part 2-38, fig. 2a Measurement accuracy Measuring frequency 700 800 Hz Switching time when covering the sensor approx. 1.0 s	·		
Input/Other circuits electronic insert FEM24 (WA) Directive conformity Electromagnetic compatibility Directive 2014/30/EU EN 61326-1:2006, EN 61326-2-3:2006 Low voltage Directive 2014/35/EU electronic insert FEM24 (WA) : EN 61010-1:2010 Conformity Electromagnetic compatibility NE 21 Degree of protection IEC 60529:2001 Vibration resistance EN 60068-2-27 Climate class EN 60068, part 2-38, fig. 2a Measurement accuracy Measuring frequency 700 800 Hz Switching time when covering the sensor approx. 0.5 s, when uncovering the sensor approx. 1.0 s			electronic inpart FFM00 (FF)
Directive conformity Electromagnetic compatibility Directive 2014/30/EU EN 61326-1:2006, EN 61326-2-3:2006 Low voltage Directive 2014/35/EU electronic insert FEM24 (WA): EN 61010-1:2010 Conformity Electromagnetic compatibility NE 21 Degree of protection IEC 60529:2001 Vibration resistance EN 60068-2-27 Climate class Measurement accuracy Measuring frequency 700 800 Hz Switching time When covering the sensor approx. 0.5 s, when uncovering the sensor approx. 1.0 s			
Directive 2014/30/EU EN 61326-1:2006 , EN 61326-2-3:2006 Low voltage Directive 2014/35/EU electronic insert FEM24 (WA) : EN 61010-1:2010 Conformity Electromagnetic compatibility NE 21 Degree of protection IEC 60529:2001 Vibration resistance EN 60068-2-27 Climate class EN 60068, part 2-38, fig. 2a Measurement accuracy Measuring frequency 700 800 Hz Switching time when covering the sensor approx. 0.5 s, when uncovering the sensor approx. 1.0 s	Directive conformity		electronic risert feiviz4 (VVA)
Low voltage Directive 2014/35/EU electronic insert FEM24 (WA) : EN 61010-1:2010 Conformity Electromagnetic compatibility NE 21 Degree of protection IEC 60529:2001 Vibration resistance EN 60068-2-27 Climate class EN 60068, part 2-38, fig. 2a Measurement accuracy Measuring frequency 700 800 Hz Switching time when covering the sensor approx. 0.5 s, when uncovering the sensor approx. 1.0 s			
Directive 2014/35/EU electronic insert FEM24 (WA): EN 61010-1:2010 Conformity Electromagnetic compatibility NE 21 Degree of protection IEC 60529:2001 Vibration resistance EN 60068-2-27 Climate class EN 60068, part 2-38, fig. 2a Measurement accuracy Measuring frequency 700 800 Hz Switching time when covering the sensor approx. 0.5 s, when uncovering the sensor approx. 1.0 s			EN 61326-1:2006 , EN 61326-2-3:2006
ConformityNE 21Degree of protectionIEC 60529:2001Vibration resistanceEN 60068-2-27Climate classEN 60068, part 2-38, fig. 2aMeasurement accuracyFendon HzSwitching time700 800 HzSwitching timewhen covering the sensor approx. 0.5 s, when uncovering the sensor approx. 1.0 s	y .		
Electromagnetic compatibility Degree of protection IEC 60529:2001 Vibration resistance EN 60068-2-27 Climate class EN 60068, part 2-38, fig. 2a Measurement accuracy Measuring frequency 700 800 Hz Switching time When covering the sensor approx. 0.5 s, when uncovering the sensor approx. 1.0 s			electronic insert FEM24 (WA): EN 61010-1:2010
Degree of protection IEC 60529:2001 Vibration resistance EN 60068-2-27 Climate class EN 60068, part 2-38, fig. 2a Measurement accuracy Measuring frequency 700 800 Hz Switching time when covering the sensor approx. 0.5 s, when uncovering the sensor approx. 1.0 s	•		NE 04
Vibration resistance EN 60068-2-27 Climate class EN 60068, part 2-38, fig. 2a Measurement accuracy Measuring frequency 700 800 Hz Switching time when covering the sensor approx. 0.5 s, when uncovering the sensor approx. 1.0 s			
Climate class EN 60068, part 2-38, fig. 2a Measurement accuracy Measuring frequency 700 800 Hz Switching time when covering the sensor approx. 0.5 s, when uncovering the sensor approx. 1.0 s	•		
Measurement accuracy Measuring frequency 700 800 Hz Switching time when covering the sensor approx. 0.5 s, when uncovering the sensor approx. 1.0 s			
Measuring frequency 700 800 Hz Switching time when covering the sensor approx. 0.5 s, when uncovering the sensor approx. 1.0 s			Lit 60000, part 2-00, fig. 2a
Switching time when covering the sensor approx. 0.5 s, when uncovering the sensor approx. 1.0 s	•		700 800 Hz
	* ' '		
- F	Operating conditions		




Installation conditions	
Installation position	see section mounting position
Process conditions	
Process temperature	-40 150 °C (-40 302 °F)
Medium pressure limits	-1 25 bar max. working pressure 25 bar, burst pressure 100 bar
Thermal shock resistance	max. 120 K
State of aggregation	solids
Solid contents	≤ Ø25 mm
Bulk density	≥ 200 g/l, not fluidised
Ambient conditions	
Ambient temperature	-40 70 °C (-40 158 °F)
Storage temperature	-40 85 °C (-40 185 °F)
Mechanical specifications	
Degree of protection	IP66/IP67, NEMA 4X
Connection	gland M20 thread G1/2, NPT1/2
Material	F16 housing: PTB-FR, cover with transparent glass made of PA12, EPDM cover seal F18 housing: aluminum EN-AC-AlSi10Mg, plastic coated cover seal: EPDM
	process connections, sensor: stainless steel 1.4435/316L
Mass	device with F16 housing, electronic insert FEM24 (WA) and R1 thread: - 500 mm (20 inch) = approx. 1.3 kg - 1000 mm (40 inch) = approx. 2.0 kg - 1500 mm (60 inch) = approx. 2.6 kg
Dimensions	max. Ø85 mm (3.3 inch), length 160 mm (6.3 inch) + L L = 500 mm, 1000 mm, 1500 mm, 20 inch, 40 inch, 60 inch
Process connection	thread R1, R1-1/2 acc. to DIN 2999 thread 1-1/4 - 11-1/2 NPT, 1-1/2 - 11-1/2 NPT acc. to ANSI B 1.20.1
Data for application in connection with hazardous areas	
EC-Type Examination Certificate	KEMA 06 ATEX 0055
Group, category, type of protection	⟨x⟩ II 1/3D Ex ta/tc IIIC T170°C Da/Dc
Directive conformity	
Directive 2014/34/EU	EN 60079-0:2012, EN 60079-31:2009
International approvals	
IECEx approval	IECEx DEK 11.0068
Approved for	Ex ta/tc IIIC T170°C Da/Dc
General information	
Supplementary documentation	technical information (TI) manuals, brief instructions (BA, KA) instruction manuals (SI)
Supplementary information	EC-Type Examination Certificate, Statement of Conformity, Declaration of Conformity, Attestation of Conformity and instructions have to be observed where applicable. For information see www.pepperlfuchs.com.
Accessories	
Optional accessories	LVL-Z200 sliding sleeve for pressurized container [Fett]LVL-Z201 sliding sleeve for pressurized container LVL-Z202 sliding sleeve for unpressurized container LVL-Z203 sliding sleeve for unpressurized container



Singapore: +65 6779 9091 pa-info@sg.pepperl-fuchs.com

Mounting position

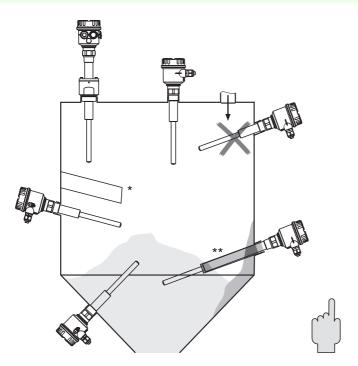


- Horizontal installation/vertical installation
 * with protective cover (to be provided by customer)
 ** with protecting tube (to be provided by customer)

Electrical connection

Electronic insert FEM22 (E5)

Three-wire DC connection

- preferred in conjunction with programmable logic controllers (PLC),
 DI modules as per EN 61131-2
- positive signal at electronics switch output (PNP)
- · Output blocked at level limit.

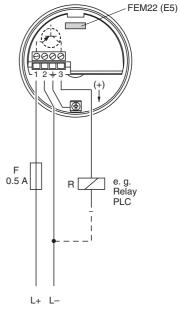


U ... 10 V ... 45 V (DC)

Electronic insert FEM24 (WA)

Universal current connection with relay output

- Power supply:
 - Please note the different voltage ranges for AC and DC.
- When connecting a device with high inductance, provide a spark arrester to protect the relay contact.
 - A fine-wire fuse (depending on the load connected) protects the relay contact in the event of a short-circuit. Both relay contacts switch simultaneously.
 - DPDT (double pole double throw)
- * When jumpered, the relay output works with NPN logic.
- ** see "Connectable load"

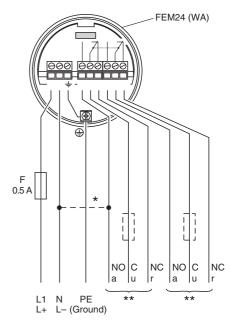

U = 19 V ... 253 V (AC) U = 19 V ... 55 V (DC)

Type Code

This overview does not mark options which are mutually exclusive.

Option with * = on request/in preparation.

Device	Device		
LVL	Vibration limit switch		

Desig	Design		
B2	Device with pipe extension		

Proces	Process connection	
N3	Thread NPT1-1/4, ANSI, 1.4435/316L	
N5	Thread NPT1-1/2, ANSI, 1.4435/316L	
R3	Thread R1, DIN 2999, 1.4435/316L	
R5	Thread R1-1/2, DIN 2999, 1.4435/316L	
XX	Special version	

Sense	Sensor length	
2	500 mm	
3	1000 mm	
4	1500 mm	
6	20 inch	
7	40 inch	
8	60 inch	

Housi	Housing, cable entrance	
A6	Aluminium housing F18, IP66/IP67, NEMA 4X, cable gland M20	
A7	Aluminium housing F18, IP66/IP67, NEMA 4X, thread NPT3/4	
A8	Aluminium housing F18, IP66/IP67, NEMA 4X, thread G1/2	
C2	Polyester housing F16, IP66/IP67, NEMA 4X, cable gland M20	
Q3	Polyester housing F16, IP66/IP67, NEMA 4X, thread NPT1/2	
P4	Polyester housing F16, IP66/IP67, NEMA 4X, thread G1/2A	

Electr	Electrical output	
E5	FEM22, 3-wire, PNP, 10 V DC 45 V DC	
WA	FEM24, relay, DPDT, 19 V AC 253 V AC, 19 V DC 55 V DC	

Additi	Additional equipment		
Α	Basic version		

Appro	Approval	
NA	NA Version for non-hazardous area	
CU	CSA General Purpose, CSA C US	
EX	ATEX II 1/3D Ex ta/tc IIIC T170°C Da/Dc	
IK	IECEx Ex ta/tc IIIC T170°C Da/Dc	