

## Inline-Compact





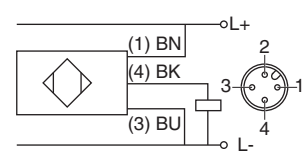
Series SDNC 503

DC 24 V

Flow monitoring

Can be easily integrated in the tubing  
Immediately ready for use – no adjustment

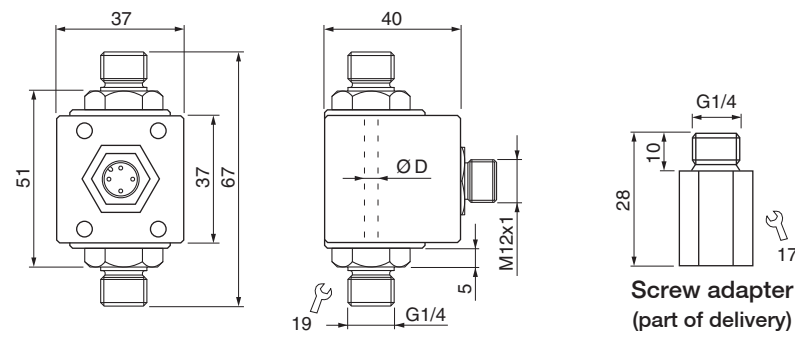

Design	G1/4 • Ø3.6 mm		
Dimensions			
Switching point [l/min]	water 0.5	water 1.0	water 1.5
Inner diameter D [mm]	3.6	3.6	3.6
Output	 PNP	 PNP	 PNP
ID-No.	P11338	P11340	P11341
Type	SDNC 503 GSP-05	SDNC 503 GSP-10	SDNC 503 GSP-15
Supply voltage [V]	24 DC ±10%		
Current consumption [mA]	≤ 70		
Switching current [mA]	200		
Ambient temperature [°C]	0...+60		
Medium temperature [°C]	0...+60		
Reaction time typ. [s]	1 (0.5...10)		
Compressive strength [bar]	10		
Sensor material	AISI 316 Ti		
Housing material	PBT-GF30		
Protection [EN 60529]	IP 67		
Connection	M12 connector		
			
Accessories	connecting cable type SLW 3-2-LED, see page 1.91		