
Installation instructions Inclination sensor JN

efector410

JN2300 JN2301 UK

80254489/00 05/2016

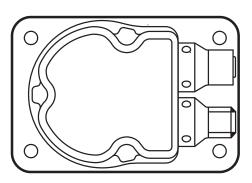

1 Functions and features

The 2-axis inclination sensor with SAE J1939 interface enables angle levelling and position detection of mobile machines.

Typical applications are, for example, the position detection of access platforms, levelling of mobile cranes or set-up of mobile machines.


2-axis inclination sensors with a measuring range of:

JN2300: ±180° / 0...360°

JN2301: ±45°

2 Symbols used

Instructions



3 Installation

▶ Disconnect the system from power before installation.

3.1 Fastening

► Fasten the device using 4 M5 screws on a flat surface. Screw material: steel or stainless steel.

3.2 Mounting surface

The housing must not be exposed to any torsional forces or mechanical stress.

▶ Use compensating elements if there is no flat mounting surface available.


4 Electrical connection

The unit must be connected by a qualified electrician.

The national and international regulations for the installation of electrical equipment must be adhered to.

▶ Disconnect the installation from power and connect the unit.

The inclination sensors are fitted with two round 5-pole M12 connectors (A-coded).

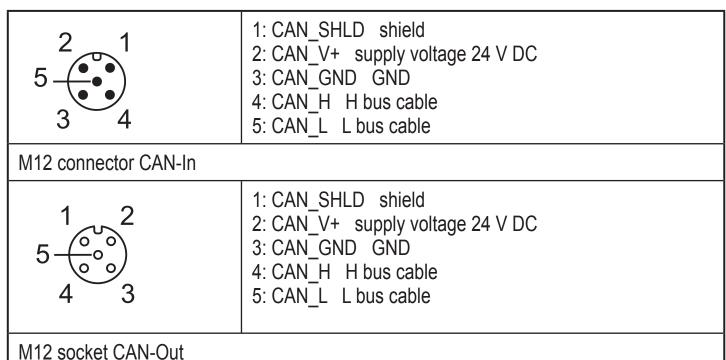

5 Technical data

Detailed manuals, technical data and further information at www.ifm.com.

6 Maintenance, repair and disposal

The unit is maintenance-free.

▶ Dispose of the device in accordance with the national environmental regulations.

7 Approvals/standards

The CE declarations of conformity and approvals can be found at www.ifm.com.