

SRX3

Ultrasonic Fork Clear Label Static or Dynamic teach with Remote in

INSTRUCTION MANUAL

The forked ultrasonic sensor for label detection works by the difference of material width inside the sensible area.
The sensor is able to detect paper, plastic (transparent type too) and metallic label on paper, plastic and metallic support tapes.


CONTROLS

STATUS LED (yellow)
The yellow LED ON indicates output activation.

MODE LED (green)
In working mode, the green LED MODE is on.
The MODE led shows the phases of the calibration and NO/NC toggling procedures (see the following chart).
The MODE LED is quickly blinks in three conditions:
1- if the sensor is not able to do a calibration,
2- if the SET push-button or the PROG input are activated more than 60 sec,
3- if the sensor detects a short-circuit condition on the outputs.


To skip from the conditions 1 and 2, it is necessary to press SET or activate PROG briefly, then the sensor restores the last valid calibration.

In case of condition 3, it is necessary to remove the short-circuit cause.




To start the LABEL calibration procedure press SET or active REMOTE and deactivate them when the MODE led is on for the first time (1s < Tp < 4s).
To start the OFFSET regulation procedure press SET or active REMOTE and deactivate them when the MODE led is off for the second time (1s < Tp < 4s).
To toggle the NO/NC output function press SET or active REMOTE and deactivate them when the green led is on for the second time (7s < Tp < 15s).
To skip any operations, release SET or deactivate REMOTE when the green led is off, after 15s.

SET PUSH-BUTTON
Press SET push-button to activate acquisition.

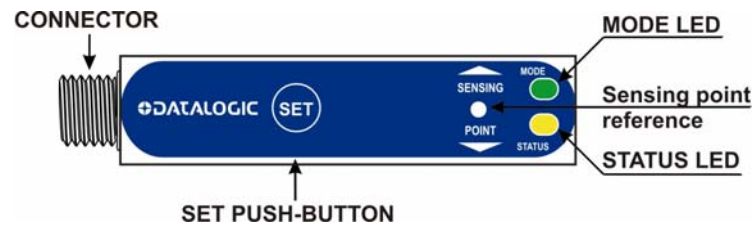


CONNECTIONS

M12 CONNECTOR (SRX3-5-US-M12-PNH / SRX3-5-US-3-M12-PNH)

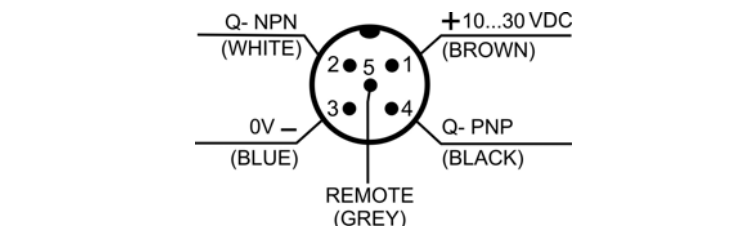

When the REMOTE wire is connected to 0V, it is as if the SET push-button was pressed.


M8 CONNECTOR (SRX3-6-US-M8-PH / SRX3-6-US-3-M8-PH)

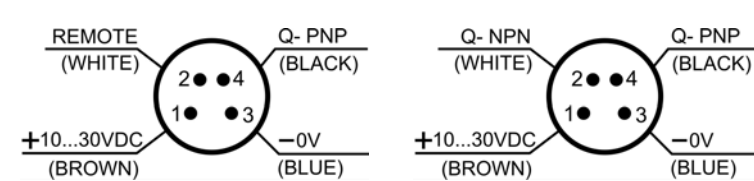


TECHNICAL DATA

| | |
|-------------------------------|---|
| Power supply: | 12 ... 30 VDC reverse polarity protection |
| Ripple: | 10 % |
| Consumption: | < 80 mA |
| Output type: | PNP + NPN |
| Output current: | 250 mA max. (short-circuit protection) |
| Voltage: | <1.5 V @ 100 mA |
| Minimum pulse time: | 1 ms |
| Detectable sizes: | > 2 mm |
| Max. Tape speed (see note 1): | 60 m/min |
| Tape size (see note 2): | > 16 mm |
| Rising time: | 0.8 us max |
| Falling time: | 1.6 us max |
| Switching frequency: | 500 Hz |
| Power on delay: | 325 ms |
| Ultrasonic frequency: | 300 kHz |
| Slot width: | 3 mm |
| Setting: | SET push-button / REMOTE |
| Indicators: | STATUS LED (yellow) / MODE LED (green) |
| Operating temperature: | 0 ÷ 50 °C |
| Storage temperature: | -25 ÷ 75 °C |
| Humidity: | 35 ... 85% rH non condensing |
| Dielectric strength: | 500 VAC, 1 min between electronic parts and housing |
| Insulating resistance: | >20 MΩ, 500 VDC between electronic parts and housing |
| Ambient light rejection: | according to EN 60947-5-2 |
| Vibrations: | 0.5 mm amplitude, 10 ... 55 Hz frequency, for every axis (EN60068-2-6) |
| Shock resistance: | 11 ms (30 G) 6 shocks per every axis (EN60068-2-27) |
| Housing material: | Aluminium |
| Mechanical protection: | IP54 |
| Connections: | M12 or M8 connector |
| Dimensions: | 90 x 55 x 22 mm |
| Weight: | 300 g |

NOTE 1:
The maximum sliding speed is proportional to the size of the short target to detect.



NOTE 2:
The width and the placement of the tape in the fork, must to cover always all the dashed area drawn around the sensing point.

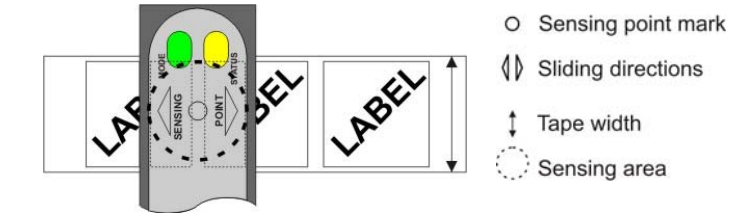

DYNAMIC CALIBRATION (SRX3-5-US)

The setting procedure is shown in the following table.
The calibration parameters are saved for restoring at next power-on.

| STEP | USER ACTION | MODE LED | SENSOR ACTION |
|------|---|------------------|---|
| 1 | Place the label in the fork | ON | In working mode |
| 2 | Press SET or active REMOTE > 1s, release SET or disactive REMOTE < 4s. | OFF - ON | Measure the SET or REMOTE activation times |
| 3 | Wait blinking on the led. | ON - Midd Blink | Do the calibration on the label |
| 4 | Run the tape for some labels. | Midd Blink | Search the best working condition |
| 5 | To end and store the calibration, press SET or active REMOTE briefly | Midd Blink | Measure the SET or REMOTE activation times. Store the new values |
| | To end but NOT store the calibration, press SET or active REMOTE up to the LED switch off | Midd Blink - OFF | Measure the SET or REMOTE activation times. Restore the previous values. |
| 6 | Release the button | ON | Return in working mode |


STATIC CALIBRATION (SRX3-5-US-3)

The setting procedure is shown in the following table.
The calibration parameters are stored, so they are pick up at next power-on.


| STEP | USER ACTION | MODE LED | SENSOR ACTION |
|------|--|-----------------|---|
| 1 | Place the label in the fork. | ON | In working mode |
| 2 | Press SET or active PROG > 1s, release SET or disactive PROG < 4s | OFF - ON | Measures the press and release times |
| 3 | Wait blinking on the LED | ON - Midd Blink | Do the calibration on the label |
| 4 | To close and store the calibration, wait the end of the blinking on the LED | Midd Blink - ON | Wait 3 s, it stores the new values and return in working mode |
| | To close WITHOUT store the calibration, press SET or active PROG briefly within 3s | OFF - ON | When the button is released, restore the previous values |

OFFSET REGULATION (SRX3-5-US-3)

At the SET release or PROG deactivation, during the second switch off LED MODE phase, the device enters in the It is showed with a slow blink on the MODE LED.
The OFFSET regulation is the adjustment of the threshold value used to discriminate the signal.
In the OFFSET regulation mode the outputs and the status led work like in the working mode.
After 10 s of no operations on SET or PROG, the OFFSET manual regulation mode is stopped.
The variations are saved, for restoring at the next power-on.

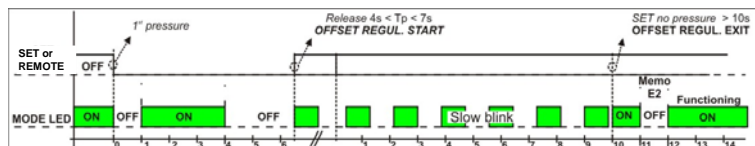


The OFFSET manual regulation mode is executed by pressing SET or activating PROG. The sensor will do the first five variations at the speed of 1/sec, the second five variations at the speed of 2/sec and the next variations at the speed of 5/sec, up to the SET or PROG deactivation or up to the reaching of minimum or maximum OFFSET value.
Each OFFSET variation is shown by a blink on the green LED.

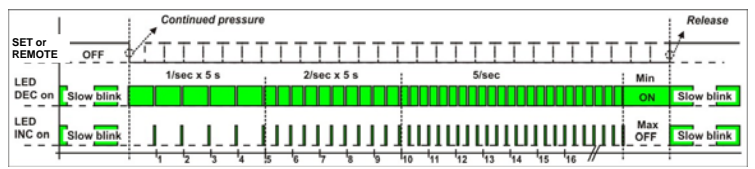


To choose the variation mode between increment or decrement of the OFFSET value, press SET or active PROG two time fast (double click), in this way the sensor toggles between the two modes at each double click.
At the end of the double click the choosed mode is shown by 2 s of LED OFF in increment mode and 2 s of LED ON in decrement mode.

At each OFFSET manual regulation startup the sensor activates the increment mode, while the choosed mode remains activated up to the exit of the OFFSET manual regulation procedure.
With increment mode and SET or PROG activation, the MODE LED is OFF and the variations pulses are ON.
With decrement mode and SET or PROG activation, the MODE LED is ON and the variations pulses are OFF.

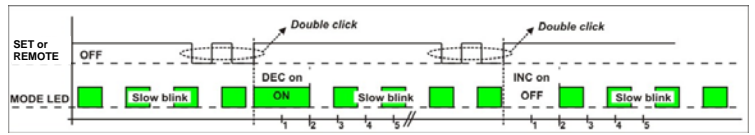


At the end of the label calibration, the sensor has an operative threshold. It is suggested to do:
- an OFFSET increment to increase the label position variations tolerance in the sensing area,
- an OFFSET decrement to improve the gap detection with little sizes and high speed tape movement.

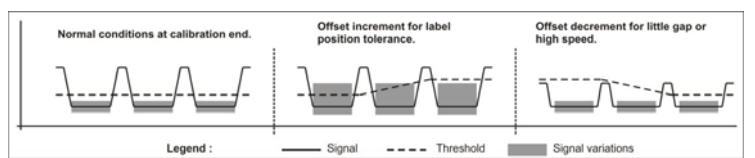

NO - NC WORKING MODE

At the SET or PROG deactivation, after the second time MODE led light on phase, the device toggles the NO/NC function of the output and the STATUS LED.
The NO/NC output function is saved, for the restoring at the next power on.
NO mode: outputs and STATUS LED are activated on the label.
NC mode: outputs and STATUS LED are activated with the label gap.

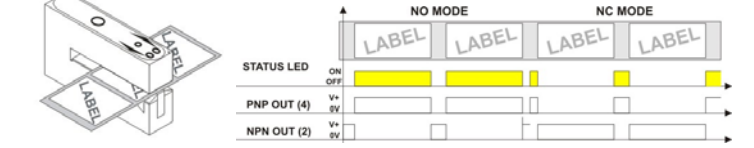


WORKING MODE NOTE

For the correct label detections, the tape must be stretch and on the carriage, in calibration and working mode.

Press SET or active PROG at the power on for more than 3 s to restore the default working condition (calibration for transparent tape and label and NO output mode), release SET or deactivate PROG during the double blink phase on the MODE LED.

DIMENSIONS

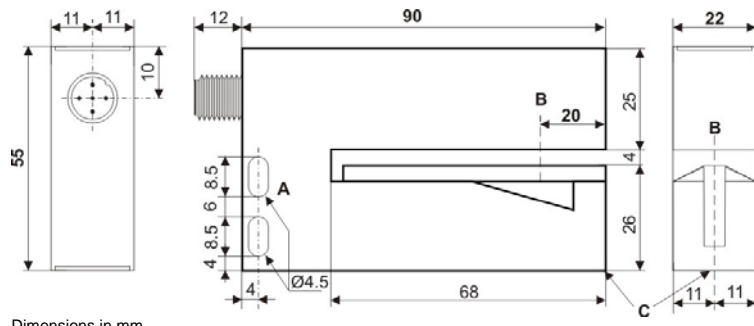

| | |
|---|-------------------------------------|
| A | Fixing Slot Ø 4.5 mm |
| B | Working point reference |
| C | Allen screw Ø 3 for labels carriage |

AVAILABLE MODELS

| Model | Description | Order No. |
|---------------------|---|-----------|
| SRX3-5-US-M12-PNH | Ultrasonic Fork Clear Label - Dynamic teach with remote in PNP+NPN NO M12 connector | 953171000 |
| SRX3-6-US-M8-PH | Ultrasonic Fork Clear Label - Dynamic teach with remote in PNP M8 connector | 953171020 |
| SRX3-6-US-M8-PN | Ultrasonic Fork Clear Label - Dynamic teach PNP+NPN NO M8 connector | 953171040 |
| SRX3-5-US-3-M12-PNH | Ultrasonic Fork Clear Label - Static teach with remote in PNP+NPN NO M12 connector | 953171010 |
| SRX3-6-US-3-M8-PH | Ultrasonic Fork Clear Label - Static teach with remote in PNP M8 connector | 953171030 |
| SRX3-6-US-3-M8-PN | Ultrasonic Fork Clear Label - Static teach PNP+NPN NO M8 connector | 953171050 |

The sensors are NOT safety devices, and so MUST NOT be used in the safety control of the machines where installed.

DECLARATION OF CONFORMITY
We Datalogic Automation declare under our sole responsibility that these products are conform to the 2004/108/CE and successive amendments.

WARRANTY
Datalogic Automation warrants its products to be free from defects. Datalogic Automation will repair or replace, free of charge, any product found to be defective during the warranty period of 36 months from the manufacturing date. This warranty does not cover damage or liability deriving from the improper application of Datalogic Automation products.

DATALOGIC AUTOMATION srl
Via Lavino 265 - 40050 Monte S. Pietro - Bologna - Italy
Tel: +39 051 6765611 - Fax: +39 051 6759324 www.datalogic.com

DATALOGIC AUTOMATION cares for the environment: 100% recycled paper. DATALOGIC AUTOMATION reserves the right to make modifications and improvements without prior notification.

© 2015 Datalogic Automation - ALL RIGHTS RESERVED - Protected to the fullest extent under U.S. and international laws. Copying, or altering of this document is prohibited without express written consent from Datalogic Automation. Datalogic and the Datalogic logo are registered trademarks of Datalogic S.p.A. in many countries, including the U.S.A. and the E.U.