


MODEL SELECTION AND ORDER INFORMATION

| OPTIC FUNCTION | OPERATING DISTANCE | CONNECTION | OUTPUT & INPUT | MODELS | ORDER No. |
|----------------------------|--------------------|----------------------|--|--------------------|-----------|
| Distance sensor (Basic) | 10 m | M12 5-pole connector | 2 Digital outputs; Analog output: Voltage (0...10 V) | S85-MH-5-Y03-00V | 951511010 |
| | | | 2 Digital outputs; Analog output: Current (4... 20mA) | S85-MH-5-Y03-00I | 951511030 |
| Distance sensor (Advanced) | 20 m | M12 8-pole connector | 2 Digital outputs; Analog output: Current (4... 20mA) or Voltage (0...10 V); RS485; Multifunction input | S85-MH-5-Y13-00IVY | 951511020 |
| | | | 2 Digital outputs; RS485; Multifunction input | S85-MH-5-Y13-00Y | 951511040 |

ACCESSORIES

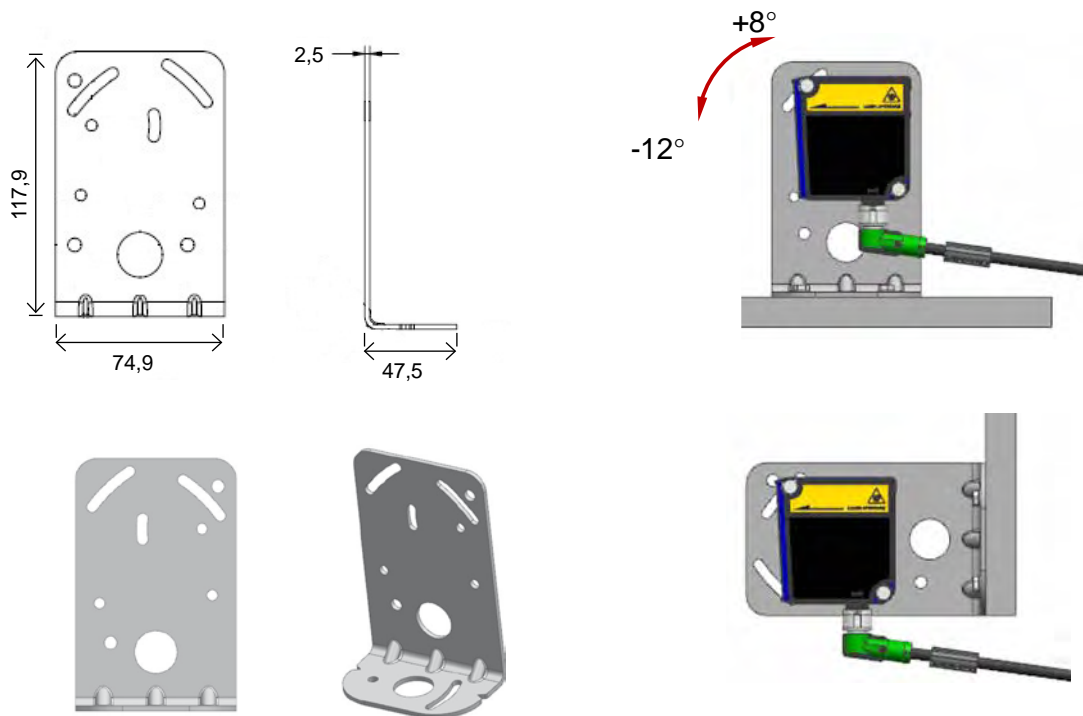

ST-S85-STD

| DESCRIPTION | ORDER N° |
|-------------------------------|-----------|
| ST-S85-STD S85 FIXING BRACKET | 95ACC7840 |