

# CE

### **Model Number**

### GL121-IR/32/40a/98a

Photoelectric slot sensor with 3-pin, M8 x 1 connector


#### **Features**


- Optimized for the detection of small • parts
- High switching frequency ٠
- Multiple device installation possible, • no mutual interference (no cross-talk)
- Sensitivity adjuster and light/dark • switch as standard features of this series
- Infrared light
- Degree of protection IP67
- cULus approval
- Diecast zinc housing, powder coated

# **Product information**


Photoelectric slot sensors offer vast installation benefits thanks to their housing design. When it comes to operation, these new generation devices boast features such as high resolution, high repeatability, automatic signal threshold adjustment, ambient light resistance, and detection of and/or light transmission through transparent objects. Cross-talk protection enables parallel installation of devices despite extremely high switching frequency. These characteristics guarantee reliable detection of small parts, from 0.3 mm, across the entire detection range, even in very fast moving applications.

# Dimensions



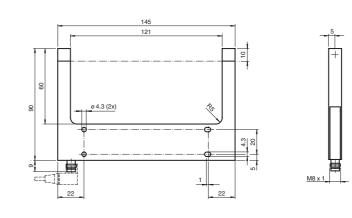


# **Electrical connection**







#### Indicators/operating means



1	Functional display	red
2	Light-/dark switch	
3	Sensitivity adjuster	

Refer to "General Notes Relating to Pepperl+Fuchs Product Information" Pepperl+Fuchs Group www.pepperl-fuchs.com

USA: +1 330 486 0001 fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 4411 fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091 fa-info@sg.pepperl-fuchs.com



Technical data				
General specifications				
Light source		IRED		
Light type		modulated infrared light		
Tests		EN 60947-5-2		
Target size		0.3 mm		
Slot width		121 mm		
Ambient light limit		100000 Lux		
Functional safety related parameters				
MTTF <sub>d</sub>		1290 a		
Mission Time (T <sub>M</sub> )		20 a		
Diagnostic Coverage (DC)		0 %		
Indicators/operating means				
Function indicator		LED red in connector		
Control elements		Sensitivity adjuster, light/dark switch		
Electrical specifications				
Operating voltage	UB	10 30 V DC, class 2		
Ripple		10 %		
No-load supply current	I <sub>0</sub>	≤ 15 mA		
Output				
Switching type		light/dark on		
Signal output		1 PNP, short-circuit protected, open collector		
Switching voltage		max. 30 V DC		
Switching current		max. 100 mA		
Repeat accuracy		0.05 mm		
Switching frequency	f	2 kHz		
Response time		≤ 250 μs		
Ambient conditions				
Ambient temperature		-20 60 °C (-4 140 °F)		
Storage temperature		-20 75 °C (-4 167 °F)		
Mechanical specifications				
Degree of protection		IP67		
Connection		M8 connector, 3-pin		
Material				
Housing		powder coated diecast zinc		
Optical face		glass		
Mass		295 g		
Approvals and certificates				
CE conformity		CE		
UL approval		cULus		
CCC approval		CCC approval / marking not required for products rated ${\leq}36~V$		

Germany: +49 621 776 4411 fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091 fa-info@sg.pepperl-fuchs.com

