



- PNP
- Normally open (NO)
- 15.00 mm
- Flush (shielded)
- Connector, M12x1-S04

**General attributes**

Approvals / Conformity	CE cULus
Basic standard	IEC 60947-5-2
Enclosure Type per IEC 60529	IP67
Function indicator	Yes
Operating distance marking	■ ■
Polarity reversal protected	Yes
Power indicator	No
Protection Class	II
Short circuit protected	Yes
Trademark	GLOBAL

**Electrical attributes**

Connection type	Connector
Eff. operating current I <sub>e</sub>	200 mA
Eff. operating voltage U <sub>e</sub> DC	24.0 V
Electrical version	DC, direct current
Load capacitance max. (at U <sub>e</sub> )	0.500 µF
Max. no-load cur. I <sub>o</sub> undamped	5.0 mA
Minimum operating current I <sub>m</sub>	0 mA
No-load current I <sub>o</sub> damped max.	10.0 mA
Operating voltage U <sub>B</sub> max. DC [V]	30.0 V
Operating voltage U <sub>B</sub> min. DC [V]	10.0 V
Rated insulation voltage U <sub>i</sub>	250 VAC
Rated short circuit current	100 A

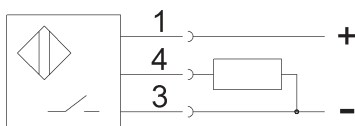

Ripple max. (% of U <sub>e</sub> )	15 %
Switching freq. f max. (at U <sub>e</sub> )	100 Hz
Switching function	Normally open (NO)
Switching output	PNP
Voltage drop static max.	2.5 V

**Mechanical attributes**

Ambient temperature T <sub>a</sub> max.	70 °C
Ambient temperature T <sub>a</sub> min.	-25 °C
Assured operating distance S <sub>a</sub>	12.20 mm
Connector type	M12x1-S04
Depth	65.0 mm
Diameter d1	M30x1.5
Eff. operating distance S <sub>r</sub>	15.00 mm
Housing material	CuZn
Mech. installation condition	Flush (shielded)
Mounting length	50.0 mm
Rated operating distance S <sub>n</sub> [mm]	15.00 mm
Sensing face material	PA 12
Surface protection	Nickel-free coating
Tightening torque	70 Nm

**Additional text**

Embeddable: See installation notes for inductive sensors with extended switching distance 825357.  
The sensor is functional again after the overload has been eliminated.

